

Scandinavian Transformer

Compact EI transformer SI-DIN TS 35

The standard moulded 1 phase EI transformers with integrated screw terminals and DIN rail TS35 mount. Designed according to the following specifications.

- High quality safety and isolating transformers designed for use in general applications
- Standard primary winding 230VAC
- Encapsulated in resin
- Detailed product specification on permanent label
- High efficiency, low regulation design
- 100% electrical and flash tested



Specifications

Power: 8 - 20 VA
Frequency: 50/60 Hz
Primary: 230 VAC
Secondary: 6, 9, 12, 15, 18, 24, 48 VAC
Isolation: 4 kV RMS
Temp. Class: B (130°)
According to: E N61558




Power [VA]	Primary [V]	Secondary [V]											
8	230	2x4	6	2x6	8	9	2x9	12	2x12	15	2x15	18	24
12			6	2x6	9	2x9	12	2x12	15	2x15	18	24	
16		2x4	6	2x6	9	2x9	12	2x12	15	18	24	48	
20			6	2x6	9	2x9	12	2x12	15	18	24	48	

Module 52

Overall Size
L x W x H [mm]
53 x 86 x 54

Module 36

Overall Size
L x W x H [mm]
36 x 90 x 67

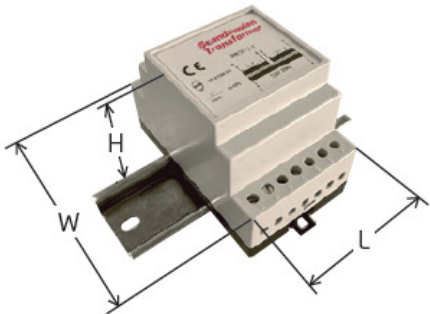

Module 52

Power [VA]	Primary [V]	Secondary [V]											
8	230	2x4	6	2x6	8	9	2x9	12	2x12	15	2x15	18	24

Module 36