

Scandinavian Transformer


Flame retardant PCB Transformer - Open

Flame retardant PCB transformer, 230 VAC primary

Flame retardant PCB mounting mains transformers. Designed according to the following specifications.

PCB mounting low voltage mains transformers with a single 230 or twin 115 VAC 50/60Hz primary winding. The two independent secondary windings may be connected in series or parallel to give a wide range of output voltage and current options

- PCB mounting low voltage mains transformers with a single 230V 50/60Hz primary winding
- Thermal fuse in primary providing overload and short circuit protection
- Flame retardant materials to UL94-V0
- Independent secondary windings suitable for series/parallel connection to give a wide range of output voltage and current options
- Double section metric bobbin construction
- Fully shrouded windings
- Full varnish impregnation
- 100% electrical and flash tested
- Extra pins for secure board mounting

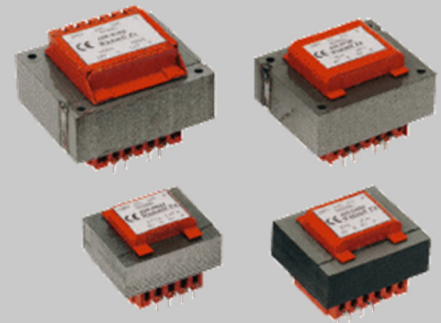

Specifications

Power: 3-20 VA
 Frequency: 50/60 Hz
 Primary: 115/230 VAC
 Secondary: 2 parallel
 Isolation: 4 kV RMS
 Temp. class: B (130°)
 According to: EN61558



Power	Regul.	Dimensions			Pins		Weight
		L [mm]	W [mm]	H [mm]	L	Ø	
[VA]	[%]	L [mm]	W [mm]	H [mm]	L	Ø	[kg]
3	20	38	35	30	5	1	0.14
6	25	43	36	33	5	1	0.18
12	12	54	45	41	5	1	0.4
20	14	60	42	54	1	0.635x0.635	0.5

Subject to errors and changes in product specifications.

Scandinavian Transformer

