

# Scandinavian Transformer


## PCB Transformer - Open

Standard PCB transformer, 230 or 115/230 VAC primary

PCB mounting mains transformers. Designed according to the following specifications.

PCB mounting low voltage mains transformers with a single 230 or twin 115 VAC 50/60Hz primary winding. The two independent secondary windings may be connected in series or parallel to give a wide range of output voltage and current options

- Double section metric bobbin construction
- Fully shrouded bobbins
- Full varnish impregnation
- Extra pins for secure board mounting
- 100% electrical and flash tested

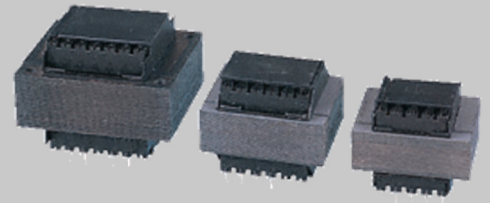





### Specifications

Power: 3-12 VA  
Frequency: 50/60 Hz  
Primary: 230 or 115/230 VAC  
Secondary: 2 parallel  
Isolation: 4 kV RMS  
Temp. class: A (105°)  
According to: EN61558-1



Power	Regul.	Dimensions			Pins		Weight
[VA]	[%]	L [mm]	W [mm]	H [mm]	L	Ø	[kg]
3	20	38	35	30	5	1	0.14
6	25	43	36	33	5	1	0.18
12	12	54	45	41	5	1	0.4

# Scandinavian Transformer

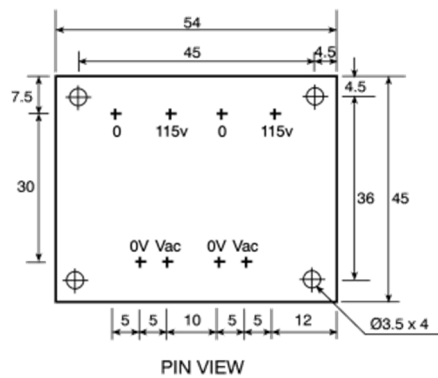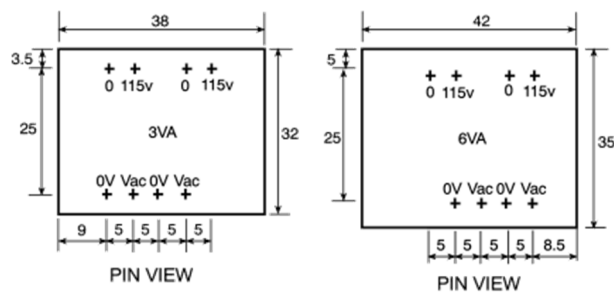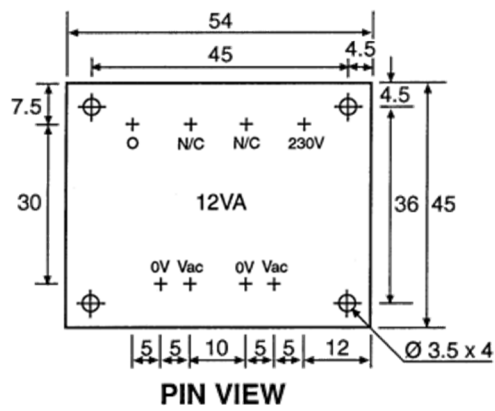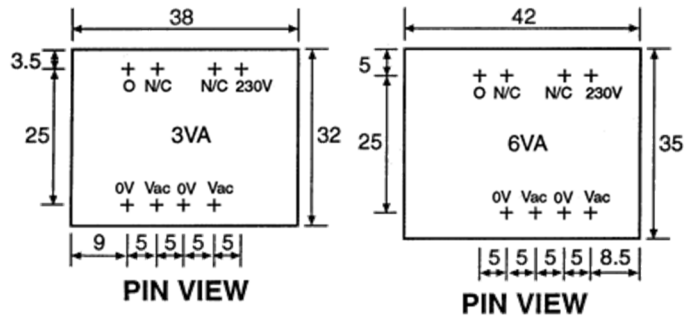

PRIMARY 0-115-0-115 VAC (FOR 115 OR 230 VAC INPUT)