
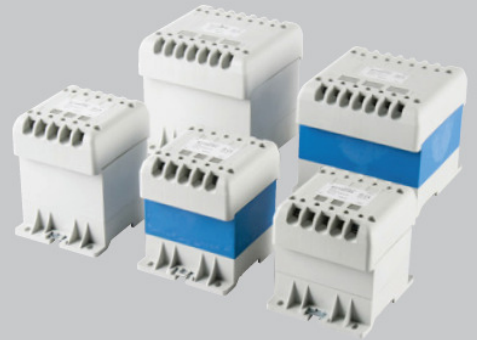


Scandinavian Transformer

Fully encapsulated Panel transformer IP21 for DIN-rail mounting

Standard 1 phase EI panel transformers with IP21 degree of protection, DIN rail TS35 and screw mounting. Designed according to the following specifications.

- High quality safety and isolating transformers designed for use in general applications
- Standard primary winding 230VAC
- IP21 Enclosure
- Detailed product specification on permanent label
- High efficiency, low regulation design
- 100% electrical and flash tested



Specifications

Power: 63 - 250 VA
 Frequency: 50/60 Hz
 Primary: 230 VAC
 Secondary: 6, 9, 12, 24, 42, 48, 115, 230 VAC
 Isolation: 4 kV RMS
 Temp. Class: B (130°)
 According to: E N61558



Technical specification

Power	Overall Size	Fixing holes		Hole Size	Weight
[VA]	A x W x H [mm]	E [mm]	F [mm]	[mm]	[kg]
63	90 x 106 x 87	68.5	90	4xØ4.5	1.5
80	90 x 106 x 97	68.5	90	4xØ4.5	1.9
100	90 x 106 x 107	68.5	90	4xØ4.5	2.3
200	126 x 136 x 117	96	121	4xØ5.5	4.2
250	126 x 136 x 127	96	121	4xØ5.5	5.0

Power [VA]	Primary [V]	Secondary [V]							
63	230	6	9	12	24	42	48	115	230
80		9	12	24	42	48	115	230	
100		9	12	24	42	48	115	230	
200		24	42	48	115	230			
250		24	42	48	115	230			

Subject to errors and changes in product specifications.